


Spray and blow-out heads with diaphragm control 323 series

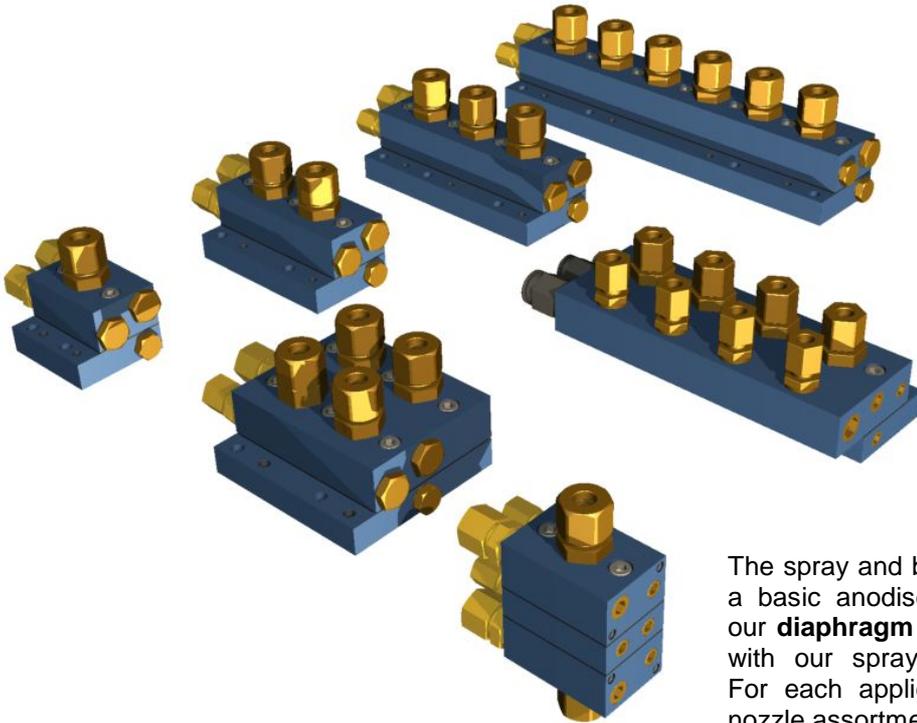

The spray and blow-out head consists of a basic anodised aluminium body with our **diaphragm control** and is equipped with our spray and blow-out nozzles. For each application we have a large nozzle assortment.

Specification

- high operating reliability with short and precise spraying impulses through our diaphragm control
- large straight-through openings (works with all common types of spray medium)
- efficient spraying through a wide range of spraying nozzles with varying angles media flow (0° - 60°)
- a large nozzle assortment for each application
- easy to clean, maintenance free

Selection of our spray and blow-out heads 323 range

	total number of spray nozzles	row of spray nozzles	control circuits	second spray medium	nozzle type	arrangement of nozzles top/bottom (symmetrically)	additional blow-out nozzles	
323-80100	1	-	1	×	BN	×	-	
323-80000	2	1	1	×	BN	×	-	
323-84000	3	1	1	×	BN	×	-	
323-80600	4	1	1	×	BN	×	-	
323-80800	6	1	1	×	BN	×	-	
323-80200	2	-	1	×	RN	✓	-	
323-80700	6	2	1	×	BN	✓	-	
323-81300	2	1	1	×	BN	×	2	
323-81600	4	1	1	×	BN	×	4	
323-83400	2	-	2	×	BN	✓	-	
323-85300	4	2	1	×	BN	×	-	
323-86300	12	2	2	✓	BN	✓	-	

BN = basic nozzle
(see brochures "Spray and blow-out nozzles")

RN = replace nozzle direct (see brochure „Replace nozzles“)